


# DATA SHEET

## KRS 11

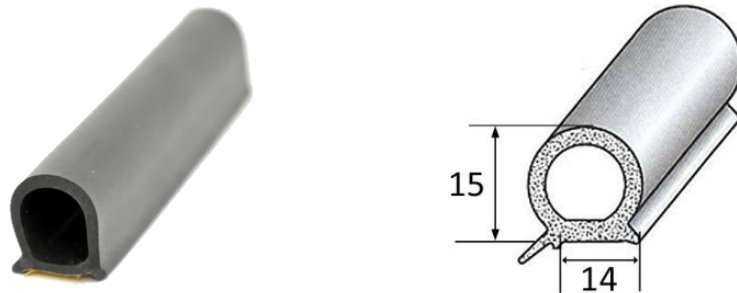

**COPMPOUND REFERENCE: EPS 0.6**

**MATERIAL: Closed Cell Expanded EPDM**

**SPECIFICATION: ATSM D1056, RE43, B2, C1**

TEST METHOD	SPECIFICATION	ACTUAL VALUES
Density	0.55 – 0.65 g/cm <sub>3</sub>	0.59 g/cm <sub>3</sub>
<b>B2</b>		
Compression Set 22 Hrs @ R.T	50% Deflection 25% Max.	18%
<b>C1</b>		
Weather Resistance	No Cracks	No Cracks
Compression Deflection	25% 11 (+ / - 2 PSI)	10 PSI
<b>Heat aging 7 days @ 70°C</b>		
Deflection Change	+/- 30%	+ 15%



T:01527 570570 F: 01527 575200  
W: [www.kingfisherrubber.co.uk](http://www.kingfisherrubber.co.uk)  
E: [sales@kingfisherrubber.co.uk](mailto:sales@kingfisherrubber.co.uk)

