


# DATA SHEET

## KR 294/E

**Compound: Ethylene Propylene Diene Monomer (EPDM)**

Test Method	Actual Values
Density	1.20 g/cc
Hardness	65 +/- 5
Tensile Strength	➤ 8.5 Mpa
Elongation @ Break	> 350%
<b><u>Heat Aging 72 Hrs @ 100°C</u></b>	
Hardness Change	+5 Max.
Tensile Strength Change	-15% Max.
Elongation Change	-25% Max.
Compression Set 22 Hrs @ 70°C	35% Max.
O-Zone Resistance	Excellent
Discolouration	None
Working Temperatures	-30°C - +100°C

*This information is given to the best of our knowledge. All test data are average values and should be considered as guidelines only*

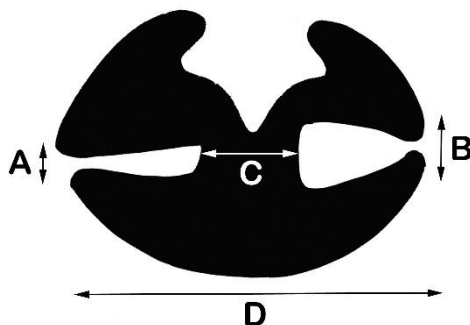

A – PANEL = 5mm  
B – GLASS = 6mm  
C – WEB = 7mm  
D – OVERALL = 23mm



T: 01527 570570 F: 01527 575200  
W: [www.kingfisherrubber.co.uk](http://www.kingfisherrubber.co.uk)  
E: [sales@kingfisherrubber.co.uk](mailto:sales@kingfisherrubber.co.uk)

