

DATA SHEET


KR 290/E

Compound: Ethylene Propylene Diene Monomer (EPDM)



Test Method	Actual Values
Density	1.20 g/cc
Hardness	65 +/- 5
Tensile Strength	> 8.5 Mpa
Elongation @ Break	> 350%
<u>Heat Aging 72 Hrs @ 100°C</u>	
Hardness Change	+5 Max.
Tensile Strength Change	-15% Max.
Elongation Change	-25% Max.
Compression Set 22 Hrs @ 70°C	35% Max.
O-Zone Resistance	Excellent
Discolouration	None
Working Temperatures	-30°C - +100°C

This information is given to the best of our knowledge. All test data are average values and should be considered as guidelines only

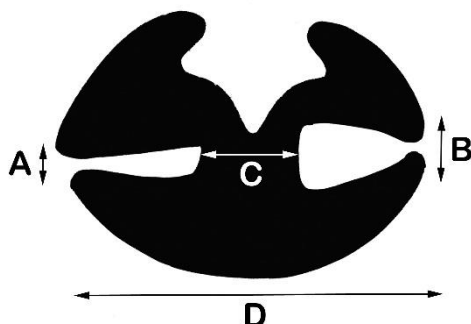

A – PANEL = 6mm
B – GLASS = 6mm
C – WEB = 7mm
D – OVERALL = 24.5mm



T: 01527 570570 F: 01527 575200
W: www.kingfisherrubber.co.uk
E: sales@kingfisherrubber.co.uk

