


MATERIAL SPECIFICATION.

KRS 2

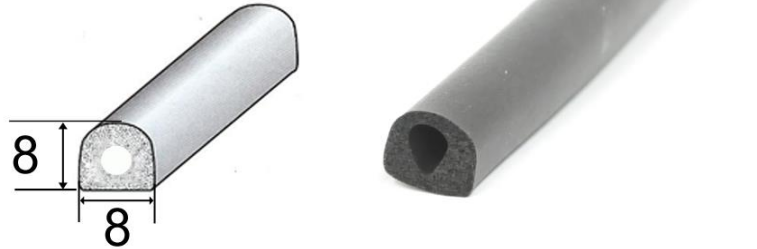

Compound Reference : EP 0.6

| | |
|------------------------|---------------------------|
| Material Description | Closed Cell Expanded EPDM |
| Material Specification | ASTM D1056,RE43,B2,C1 |

| Test Method | Specification | Actual Values |
|------------------------------|------------------------------|------------------------|
| Density | 0.55 – 0.65g/cm ³ | 0.59 g/cm ³ |
| B2 | | |
| Compression Set 22 hrs @ R.T | 50% Deflection | |
| | 25% Max | 18% |
| C1 | | |
| Weather Resistance | No Cracks | No Cracks |
| Compression Deflection | 25% Deflection | |
| | 11 +/-2 PSI | 10 PSI |
| Heat ageing 7 days @ 70c | | |
| Deflection Change | +/- 30% | +15% |

Tolerances to BS 3734 class E3.



Market Leaders in the
Rubber & Plastics industry

