


DATA SHEET


KR 256

Compound: Poly Vinyl Chloride (PVC)



Test Method	Typical Result
Specific Gravity	1.46
BS Softness @ 24 Hours	60
Shore A Hardness	66
Tensile Strength	11 Mpa
Stress @ 100% Modulus	4.0 Mpa
Elongation @ Break	390%
Cold Flex Temperature	-37°C
Cold Bend Temperature	-45°C
Congo Red Heat Stability @180°C	> 180 mins

This information is given to the best of our knowledge. All test data are average values and should be considered as guidelines only

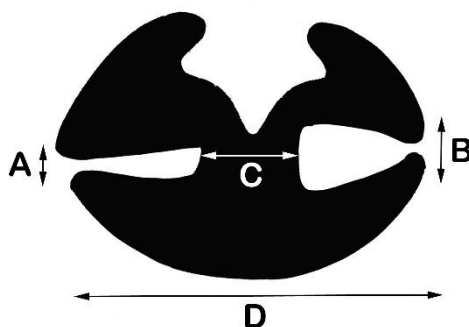

A – PANEL = 3mm
B – GLASS = 6mm
C – WEB = 7mm
D – OVERALL = 22.5mm



T:01527 570570 F: 01527 575200
W: www.kingfisherrubber.co.uk
E: sales@kingfisherrubber.co.uk

